




Expanding Horizons

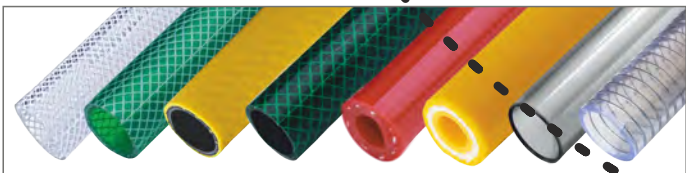


A GROUP COMPANY OF **DIVYA IMPEX**



DIVYA
I M P E X

(Govt. Recognized Star Export House)

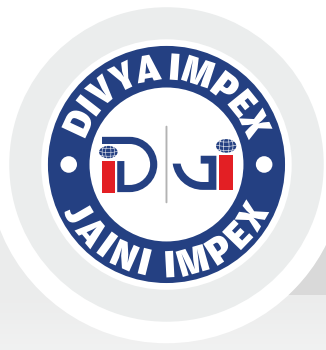

ABOUT US

“Divya Impex” - A Government Recognised Star Export House operating from Ahmedabad - Gujarat, INDIA, is well known for all types of PVC Hoses, Fittings, Related Accessories, Tarpaulin & Ropes etc.

Its roots come from “Divya Group” of Companies, which was established in the year 1988 by Mr. Deepak Panchal, who left no stone un-turned to ensure the organisation remains completely committed to its customers all the time.

In the zest of providing excellent and unmatched services to their clients, “Divya Group” of companies launched a new venture under its flagship by the name “JAINI IMPEX”, which is promoted & managed by Mr. Rushir Panchal under the mentorship of Mr. Deepak Panchal.

Today “Divya Impex” & “Jaini Impex” are jointly managed by him and his son Mr. Rushir Panchal.

VISION

Explore new borders and boundaries for attaining growth and great heights and also stay committed, sincere, honest and rooted towards each and every client – Existing & Potential.

MISSION

Maintain and provide International Standards for all products and services for our clients.

GLOBAL DISTRIBUTORSHIP

Divya Impex & Jaini Impex export their products to various countries across the globe....

- | | | |
|----------------|----------------|----------------------------|
| ♦ U.A.E. | ♦ Oman | ♦ Bahrain |
| ♦ Doha | ♦ Kuwait | ♦ Yemen |
| ♦ Saudi Arabia | ♦ South Africa | ♦ West Africa |
| ♦ Canada | ♦ U.K. | ♦ Kenya |
| ♦ Sri Lanka | ♦ Mauritius | ♦ Singapore |
| ♦ Afghanistan | ♦ Tanzania | ♦ Australia & Many More... |

STRENGTH


- ♦ International Quality Standards
- ♦ Timely Shipments
- ♦ Enhanced and ensured security for clients by providing free insurance covered by reputed companies for warehouse -to-warehouse logistics

USP

- ♦ A “One Stop Shop” for all your requirements pertaining to PVC Hose Pipes, its fittings and related accessories, Tarpulin, Ropes etc.
- ♦ Completely Customizable products

MEMBERSHIP

- ♦ Federation of Indian Export Organisations
- ♦ Gujarat Chamber of Commerce and Industry



An ISO 9001 : 2008 Certified Organisation



AWARDS & ACHIEVEMENTS






Excellence Award for the Year 2008-09



Government Recognition

Global Distributorship for Brand





PVC SUCTION & DISCHARGE HOSE



SUMOFLEX LIGHT DUTY SUCTION HOSE			
SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	1.6	5.2	17
1"	1.7	5.2	17
1.25"	1.9	4.9	15
1.5"	2.0	4.1	13
2"	2.1	3	12
2.5"	2.9	3	12
3"	3.2	2.9	11
4"	4.0	2.9	11
5"	5.5	2	8
6"	6.0	2	8

GOPIFLEX MEDIUM DUTY SUCTION HOSE			
SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	1.7	5.5	18
1"	1.8	5.5	18
1.25"	2.0	5	16
1.5"	2.2	4.5	14
2"	2.6	3.5	13
2.5"	3.0	3.5	13
3"	3.6	3	12
4"	4.8	3	10
5"	5.5	2	8
6"	6.3	2	8
8"	9.0	2	8

AQUAFLEX HEAVY DUTY SUCTION HOSE			
SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	2.2	7	24
1"	2.2	7	23
1.25"	2.3	6	19
1.5"	2.5	4.8	15
2"	3.0	3.8	14
2.5"	3.5	3.8	14
3"	3.9	3.2	13
4"	5.0	3.2	13
5"	6.0	2.5	9
6"	6.5	2.5	9
8"	9.0	2.5	9
10"	12.0	2	8
12"	15.0	1.5	6


FINEFLEX SUPER HEAVY DUTY SUCTION HOSE			
SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	2.3	7	24
1"	2.3	7	23
1.25"	2.5	6.5	20
1.5"	2.6	5	16
2"	3.5	4	16
2.5"	4.2	4	16
3"	4.4	3.5	15
4"	5.5	3.5	11
5"	6.0	2.5	9
6"	7.0	2.5	9
8"	10.0	2.5	9
10"	15.0	2	8
12"	18.0	1.5	6

OLIVE GREEN HEAVY DUTY SUCTION HOSE			
SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
1"	3.0	8	25
1.25"	3.2	7	21
1.5"	4.0	5.5	18
2"	4.8	4.5	18
2.5"	5.0	4.5	18
3"	5.5	4.5	18
4"	6.5	4	14
6"	8.0	2.5	9
8"	10.0	2.5	9
10"	15.0	2	8
12"	18.0	1.5	6

DISTINCTIVE FEATURES

100% Flexible PVC Construction

Can be used at most awkward curves & bends without any stiffness. Meticulous spiral reinforcement made from rigid PVC in soft PVC wall ensures high impact, crushing & kinking resistance as well great flexibility.



PVC SUCTION & DISCHARGE HOSE



GREY SUCTION HOSE HEAVY DUTY

SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	3.0	10	30
1"	3.0	8	25
1.25"	3.5	7	21
1.5"	4.1	5.5	18
2"	5.0	4.5	18
2.5"	5.5	4.5	18
3"	5.5	4.5	18
4"	6.5	4	14
5"	7.0	3	10
6"	8.5	2.5	9
8"	10.6	2.5	9
10"	15.0	2	8
12"	18.0	1.5	6

BLUE OIL HOSE HEAVY DUTY

SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	3.0	10	30
1"	3.0	8	25
1.25"	3.5	7	21
1.5"	4.1	5.5	18
2"	5.0	4.5	18
2.5"	5.5	4.5	18
3"	5.5	4.5	18
4"	6.5	4	14
5"	7.0	3	10
6"	8.5	2.5	9
8"	10.6	2.5	9
10"	15.0	2	8

DUCT HOSE GREY HEAVY DUTY

SIZE	Wall Thickness MM	Working Pressure kg/cm ²	Bursting Pressure kg/cm ²
3/4"	3.8	3.75	20
1"	3.5	3.75	16
1.25"	3.4	3.5	13
1.5"	3.5	3.1	10
2"	3.2	2.6	8
2.5"	4.0	1.5	5
3"	3.5	1.5	4
4"	3.9	1	4.2
5"	4.1	0.7	3.5
6"	4.3	0.6	2.8
8"	5.0	0.5	2
10"	5.5	0.3	2
12"	6.0	0.25	2

GENERAL APPLICABILITY OF SUCTION & DISCHARGE HOSES


- ♦ Multi purpose suction & Delivery of water
- ♦ Diesel oil, Mineral oil, Light chemicals conveying
- ♦ Construction Mining
- ♦ Light application for oil suction
- ♦ Light dredge suction, moderate vacuum service, General suction
- ♦ Dust control, air-conditioning and ventilation ducting
- ♦ Vacuum and abrasive dust handling
- ♦ Industrial uses | Gardening uses
- ♦ Material handling | Grain handling
- ♦ Vapour recovery and many more...

Recommended Maximum working Temperature : 60°C
The Technical Specifications mentioned are on approximate basis. + - variations are possible.





PVC REINFORCED HOSE | GARDEN HOSE

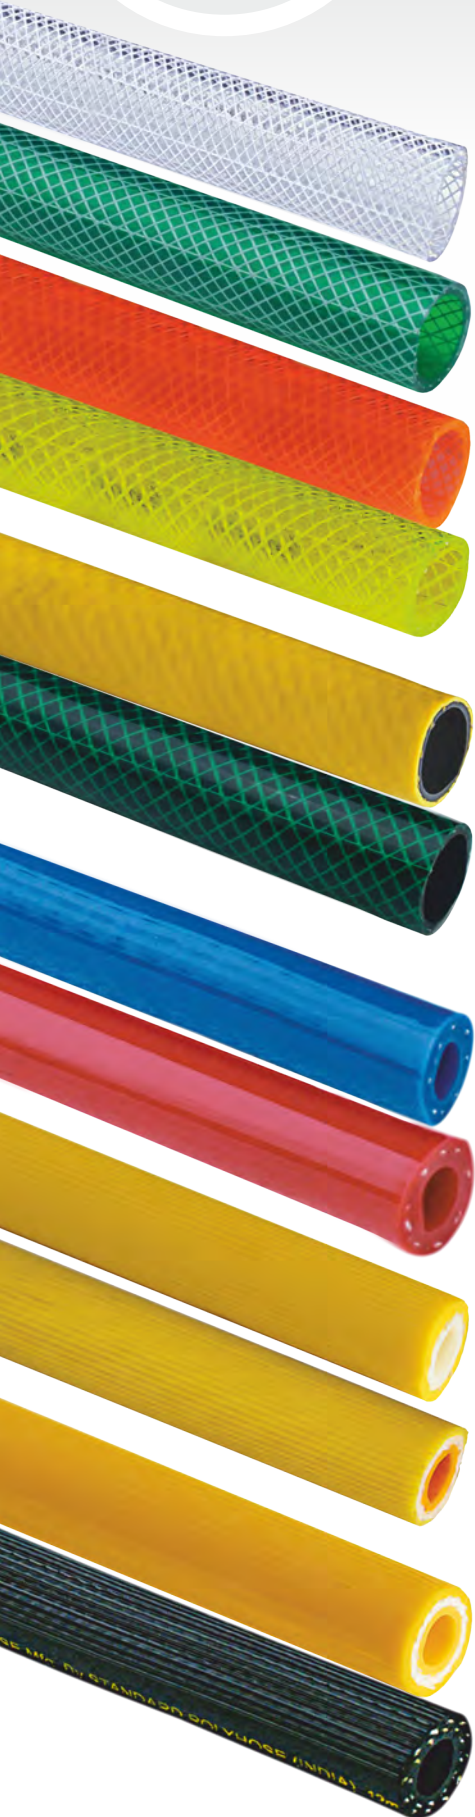

EUROLON REINFORCED HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
1/2"	1.6	7
3/4"	2.2	7
1"	2.7	5

MRV REINFORCED HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
1/2"	2.3	14
3/4"	2.9	14
1"	3.6	11
1.25"	3.7	11
1.5"	3.6	11
2"	4.0	7

FINEFLOW REINFORCED HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
1/4"	2.5	25
5/16"	2.5	20
3/8"	2.8	20
1/2"	2.8	16
5/8"	2.6	15
3/4"	3.4	17
1"	4.0	12.5
1.25"	4.2	13
1.5"	4.0	12
2"	5.0	8.5

PREMIUM REINFORCED HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
3/16"	2.5	30
1/4"	3.0	30
5/16"	3.0	25
3/8"	3.5	25
1/2"	3.5	20
5/8"	3.5	20
3/4"	4.0	20
1"	4.8	15
1.25"	4.8	15
1.5"	5.0	15
2"	6.0	10

YELLOW / BLACK GARDEN HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
1/2"	1.7	7
3/4"	2.2	7
1"	2.8	5

GREEN / BLACK GARDEN HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
1/2"	1.7	7
3/4"	2.2	7
1"	2.8	5

RED/BLUE PREMIUM WELDING HOSE	SIZE	5/16"	3/8"
	Wall Thickness MM	3.0	3.5
	Working Pressure kg/cm2	25	25

YELLOW SPRAY HOSE	SIZE	8 MM
	Wall Thickness MM	3.0 MM
	Working Pressure kg/cm2	32


YELLOW SUPER SPRAY HOSE	SIZE	8.5 MM	10 MM	12 MM
	Wall Thickness MM	3.75 MM	5.0 MM	5.5 MM
	Working Pressure kg/cm2	60	40	30

PREMIUM ROCK DRILL HOSE


SIZE	Wall Thickness MM	Working Pressure kg/cm2
3/4"	4.5	20
1"	4.8	15

PREMIUM CAR WASHING HOSE

SIZE	Wall Thickness MM	Working Pressure kg/cm2
8 mm (5/16")	4.0	40
10 mm (3/8")	5.0	40
12 mm (1/2")	5.5	30



PVC LEVEL PIPE | CLEAR TUBING | ACRYLIC PIPES

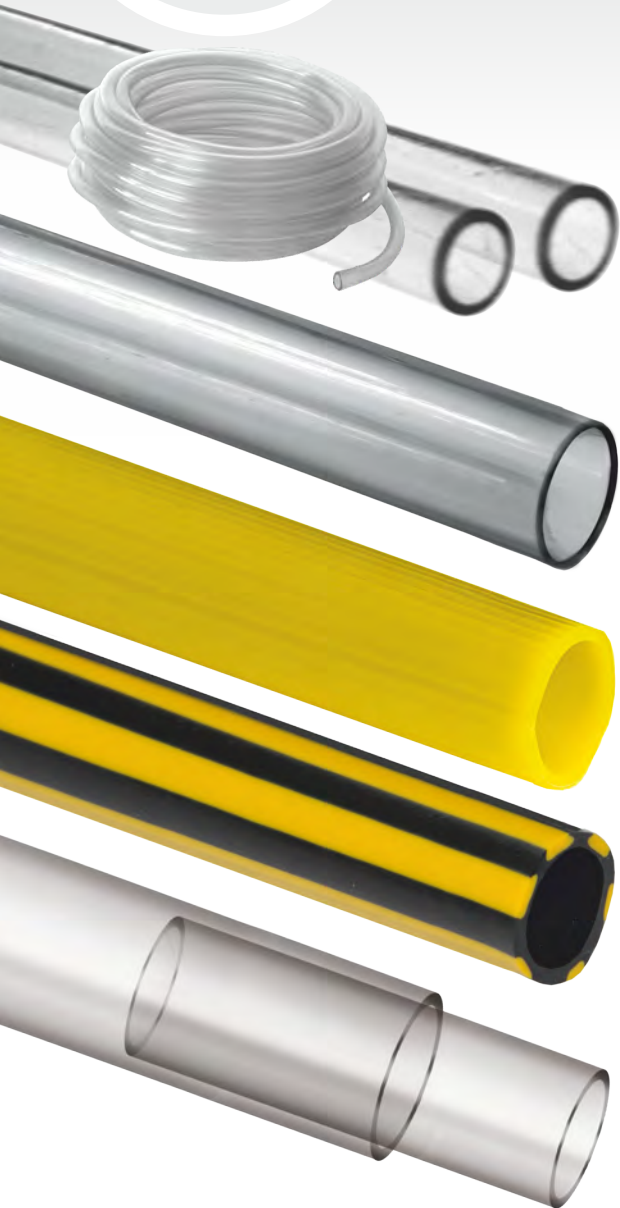

PVC LEVEL PIPE

SIZE	6 mm	8 mm	10 mm
Wall Thickness MM	1 mm	1 mm	1 mm

PVC CLEAR TUBING HOSE

SIZE	4 mm	5 mm	6 mm	8 mm	10 mm	12 mm
Wall Thickness MM	1	1	2.0	2.0	3.0	3.0

SIZE	16 mm	19 mm	25 mm	31 mm	40 mm
Wall Thickness MM	3.0	3.5	3.5	2.5	2.5

PVC YELLOW LINING HOSE

SIZE	1/2"	3/4"	1"
Wall Thickness MM	2.0	2.0	2.0

PVC ZEBRA LINING HOSE

SIZE	1/2"	3/4"	1"
Wall Thickness MM	2.0	2.0	2.0

CRYSTAL CLEAR ACRYLIC PIPES

Available in all Sizes

DISTINCTIVE FEATURES

- ♦ Open mesh nylon braiding encapsulated between walls of PVC Tubing to become one hose
- ♦ Offers higher pressure capabilities than other hoses
- ♦ Crystal clear compound provides full visual flow
- ♦ Mirror smooth interior permits outstanding flow characteristics
- ♦ Corrosion & abrasion resistant with flexibility similar to rubber but with much longer life & lighter weight

GENERAL APPLICABILITY OF REINFORCED HOSES


- ♦ Gardening uses
- ♦ Compressed air applications
- ♦ Industrial / Construction uses
- ♦ Pneumatic applications
- ♦ Automobile services & Garage applications
- ♦ Welding Applications
- ♦ Mining & Rock Drilling
- ♦ Agricultural spraying such as insecticides, fertilizers & water
- ♦ Light application for oil suction
- ♦ Pest control
- ♦ Diesel oil, Mineral Oil, Light chemicals conveying

PROVEN BEST IN


- ♦ Rock Drill Heavy Duty Hose is being widely used with jack hammers in Quarries and Mines
- ♦ Welding Hose is well accepted in all kind of Gas/Welding applications
- ♦ Agricultural Pesticides, Insecticides are being handled by SUPER SPRAY YELLOW HOSE
- ♦ Pneumatic hoses are excellent in working with all kind of compressors and other pneumatic equipment
- ♦ Braided Garden hoses are ideal for all gardening & water delivery purpose
- ♦ Car Washing hoses are identically serving needs of all vehicle washing and garage applications

Recommended Maximum working Temperature : 60° C
The Technical Specifications mentioned are on approximate basis. + - variations are possible.



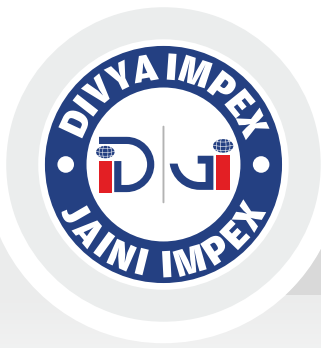

CONDUIT PIPE | CABLE SLEEVE | SPRING HOSE | FLAT HOSE

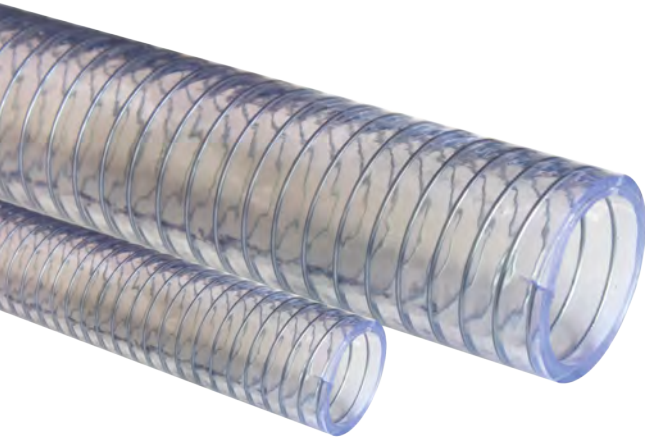

**CONDUIT PIPES / CABLE SLEEVES
BLACK - SLITTED**

OD	ID	OD	ID
7MM	5MM	25MM	20.5MM
10MM	7.5MM	32MM	25MM
14MM	10.5MM	40MM	32MM
16MM	12.5MM	50MM	43MM
20MM	15.5MM		

**CONDUIT PIPES / CABLE SLEEVES
GREY & BLACK - NON SLIT**

16 MM (OD)	32 MM (OD)
20 MM (OD)	40 MM (OD)
25 MM (OD)	50 MM (OD)

DISTINCTIVE FEATURES & APPLICATION

- ◆ Light, Flexible & Durable Hoses- With ease of handling
- ◆ Industrial & Domestic applications
- ◆ Suitable as electrical conduit pipes
- ◆ Also useful for sanitary & plumbing requirements

SPRING HOSE / THUNDER HOSE

DISTINCTIVE FEATURES & APPLICATIONS

- ◆ Transparent Hose embedded with spiral steel wire inside soft PVC for additional strength & anti-static purpose
- ◆ Non-Toxic, Food Grade Hose
- ◆ Multi-Purpose usage as in Coolent Flow, Food & Beverage, Water & Air Feed, Chemical Transfer, conveying Bulk Drugs and any Food Grade Material

LAY FLAT HOSE

APPLICATION & USES

- ◆ High strength , durability & flexibility
- ◆ Ease of handling during Transport, Storage & Usage
- ◆ Designed for both Light Duty & Heavy Duty applications
- ◆ Mostly used with agricultural equipment where water flow thru irrigation system is required
- ◆ **Additional uses :** Water Pumps, Pool, Construction, Mines & Marine

Recommended Maximum working Temperature : 60°C
The Technical Specifications mentioned are on approximate basis. + - variations are possible.



P. P. FITTINGS



P. P. Foot Valve - Red




P. P. Foot Valve Bolted - Green



P. P. Hose Collar



P. P. Hose Connector

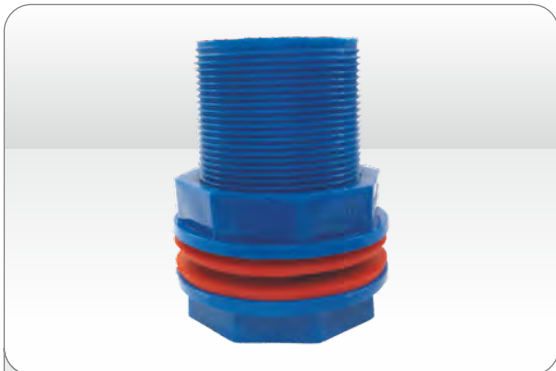


P. P. Tank Jointer



P. P. Couplings



O-Rings | Check Valve | Air Cocks

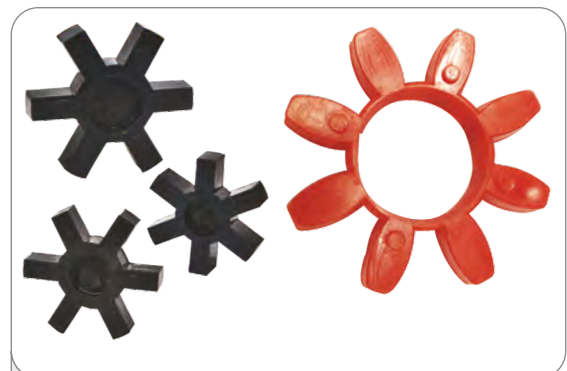

Coupling Elements

ALUMINIUM | C. I. FITTINGS



Aluminium Hose Coupling



Aluminium Hose Collar



Aluminium Hose Connector



G. I. King Nipple | Hose Connector




ALSO AVAILABLE IN PN STANDARD

C. I. Foot Valve (Threaded / Flanged)



C. I. Hose Collar | Connector

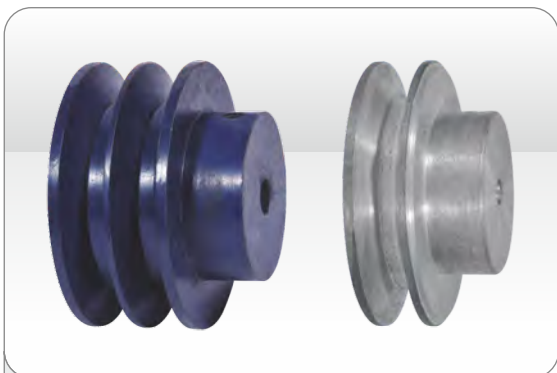


Pulley (C. I. / Aluminium)



C. I. Flexible Couplings


BRASS FITTINGS

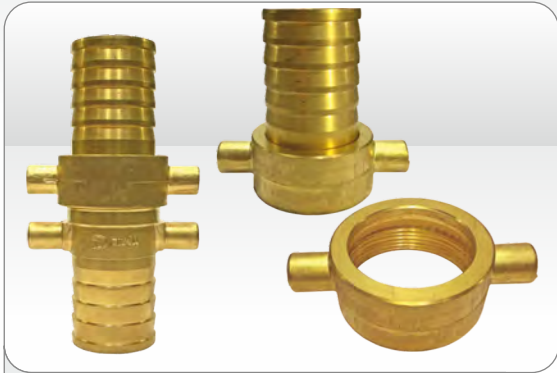

Brass Coupling




Brass Hose Collar (O/T, I/T)

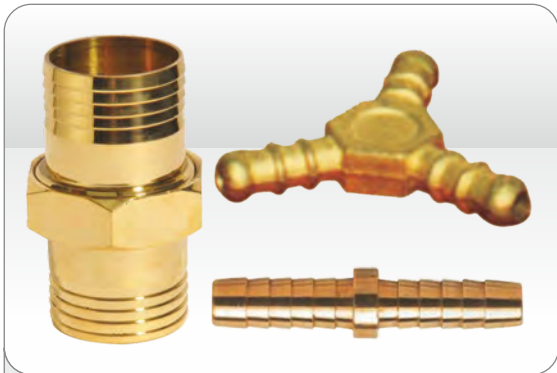

Brass Hose Connector / Jointer



Brass Hex Nipple

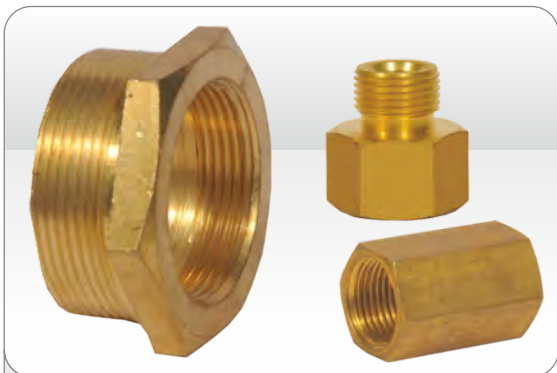

Brass Bushes | Socket | M/F Adaptor



Brass Tank Connector



Brass Elbow | Tee



Brass Grease Nipple

TARPAULIN

DJ ALL WEATHER MULTIPURPOSE TARP



OUTSIDE STORAGE



DINING CANOPY



CAMPING & BOATING



FARMING



TRANSPORTATION



MOBILE HOME TENT FLY

IDEAL FOR

- ♦ TRANSPORTATION
- ♦ INDUSTRIAL
- ♦ AGRICULTURAL
- ♦ MARINE APPLICATIONS
- ♦ CONSTRUCTION
- ♦ EFFLUENT TREATMENT
- ♦ RECREATIONAL
- ♦ HOME AND UTILITY
- ♦ LINING OF POND

- ♦ Heavy Duty, Fiber Reinforced Polyethylene
- ♦ Washable-Shrinkproof-Rotproof
- ♦ Rope Reinforced Edges
- ♦ Heavy Duty, Rust-Resistant Eyelets at every mtr.
- ♦ All Temperature / All Season Use

SHED NET | ROPE



APPLICATIONS

- ◆ UV Protection from harmful sunlight
- ◆ Shade for green house & constructions
- ◆ Soil erosion control
- ◆ Moisture control
- ◆ General purpose fencing
- ◆ Horticulture-Nursery-Floriculture
- ◆ Inset & Bird barrier
- ◆ Protection against wind damage
- ◆ Temperature control for house & factory
- ◆ Carpet as decoration

USES

- ◆ Garden Fencing
- ◆ Floury Culture
- ◆ Poultry Farm
- ◆ Vermicompose
- ◆ Tea Garden
- ◆ Nursery
- ◆ Carpet / Parking

ROPE




CABLES



BATTERY CABLES

Cross Section Area (Nom.) Sq.mm	Insulation Thickness (Nom) mm	Overall Diameter (approx.) mm	Current Carrying Capacity Amps.
6	0.8	5.2	31
10	1	6.6	42
16	1	7.8	57
25	1.2	9.7	71
35	1.2	11	91
50	1.4	13.2	120
70	1.4	15.3	165
95	1.6	17.9	200
120	1.6	19.4	225
150	1.8	21.9	250
185	2	24.5	300
240	2.2	28	425

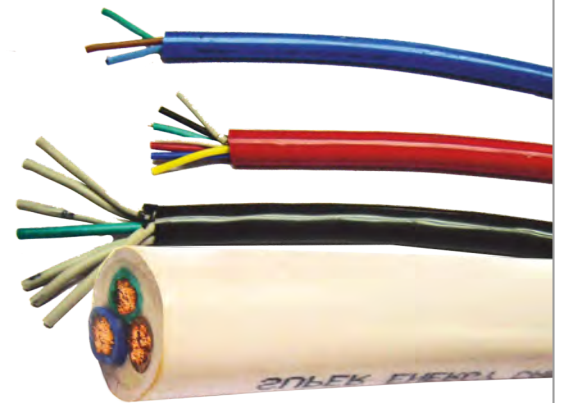

WELDING CABLES

Cross Section Area (Nom.) Sq. mm	Conductor resistance at 20 °C ohm/km max	Thickness of Inner sheath type S.E.1 normal mm	Current rating (at ambient 30 °C Max. Conductor temperature 60 °C at a max duty cycle of)				Hand welding current rating as per IS:434 normal amps	Over All Dia Meter MM
			100% amps	85% amps	60% amps	30% amps		
16	1.21	2.00	94	102	121	172	100	
25	0.780	2.00	125	136	161	228	150	
35	0.554	2.00	156	169	201	285	230	13.00
50	0.386	2.20	197	214	254	360	400	15.00
70	0.272	2.40	248	269	320	453	600	17.00
95	0.206	2.60	299	342	386	546	-	20.00
120	0.1610	2.80	360	390	465	657	-	21.50
150	0.1290	3.00	430	466	555	785	-	
185	0.1060	3.20	502	545	648	916	-	
240	0.0801	3.40	616	668	795	1125	-	
300	0.0641	3.60	722	722	932	1318	-	

OTHER **FITTINGS**



Battery Terminal



Brass Hinges | Tower Bolt | Turn button



Hose Clamps




Hose Clips



Rubber Mounting



Butterfly Valve

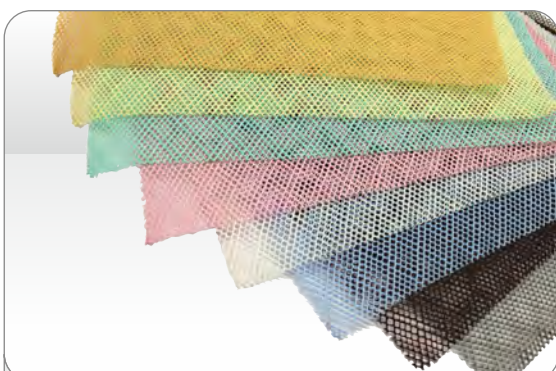

Mosquito Net



Box Strap

Our Footprints

U.A.E. | Oman | Bahrain | Doha | Kuwait | Yemen | Saudi Arabia | South Africa
West Africa | Canada | U.K. | Kenya | Sri Lanka | Mauritius | Singapore
Afghanistan | Tanzania | Australia



The colours displayed in the pictures used in this brochure may vary to some extent in the actual products. Company reserve rights to change any technical specifications / colour without prior notice.

INDUSTRIES / SEGMENTS WE SERVE



Water



Agriculture



Oil



Gas



Petrol



Chemical



Engineering



Power



Infrastructure



Electrical



Plastic Mfg.



Steel



DIVYA
I M P E X

(Govt. Recognized Star Export House)



JAINI
I M P E X

A GROUP COMPANY OF **DIVYA IMPEX**

202, Wall Street-I, Opp. Orient Club, Ellisbridge, Ahmedabad-380006. Gujarat. India.

Ph. : +91-79-2644 0978 | +91-79-2640 5086 | +91-79-2640 5087

Fax : +91-79-2644 0857

Cell : +91-98250 90783 | +91-98798 35272

E-mail : deepak@divyapipes.com | rushir_panchal@yahoo.co.in

Web : www.divyapipes.com